


	Description of Key (on IR Remote Controller)	Description of Key (in C-Code)	Infrared Codes (HEX)	SC-33 Key Layout Position
1	Power	KEY_SPOWER	0X00	3
2	Menu	KEY_MAIN	0X01	5
3	Up (symbol)	KEY_TOP	0X02	8
4	Down (symbol)	KEY_BOT	0X03	14
5	Left (symbol)	KEY_LFT	0X04	10
6	Right (symbol)	KEY_RGT	0X05	12
7	Enter (symbol)	KEY_ENTER	0X06	11
8	Input 1: Graphics	KEY_INPUT1	0X07	25
9	Input 2: HD Video	KEY_INPUT2	0X08	28
10	Input 3: SD Video	KEY_INPUT3	0X09	31
11	Aspect Ratio	KEY_ASPECT	0X0A	27
12	AnyPlace Keystone	KEY_KEYSTO	0X0B	30
13	Picture Settings	KEY_PICTURE	0X0C	33
14	Zoom Out/ Throw +	KEY_ZOOMOUT	0X0D	17
15	Zoom In/ Throw -	KEY_ZOOMIN	0X0E	20

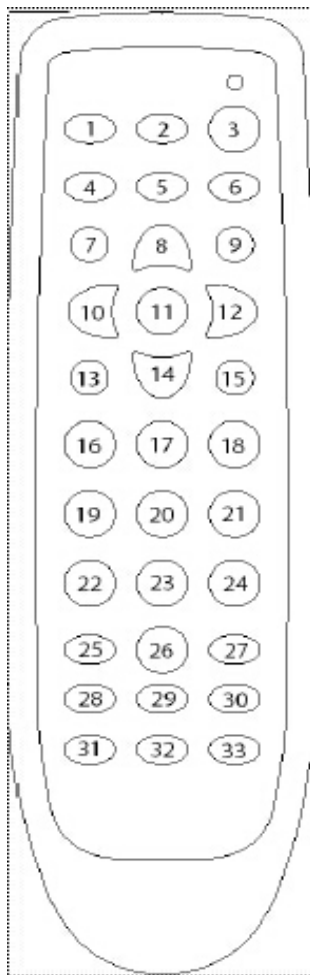

NOTE:  
IR Code Format is NEC R 32-bit  
Carrier Freq: 38KHz