

JVC®

The Perfect Experience / —

DLA-RS15

Full HD D-ILA Front Projector

D-ILA®

Full HD
1920x1080



Picture Quality is Truly Remarkable.

Unrivaled Picture Quality

- High native contrast ratio: 32,000:1
- Clear Motion Drive
- Inverse telecine (reverse 2-3 pulldown)

Fine-tuned for Superb Images


- JVC original picture modes
- Screen adjustment mode
- High-performance 2x motorized zoom lens
- HQV Reon-VX video processor

Outstanding Flexibility and Convenience

- Newly designed remote controller
- Quiet operation: Only 19dB
- V: 80%/H: 34% motorized lens shift
- Motorized lens cover

High native contrast ratio: 32,000:1

The DLA-RS15 D-ILA projector employs a fixed aperture on the lens to help eliminate unnecessary light that can lower contrast levels to make possible a high native contrast ratio of 32,000:1. Enhanced brightness and deeper, richer blacks make the DLA-RS15 ideal for viewing diverse content, from movies and music videos to live concert performances and sports programs.

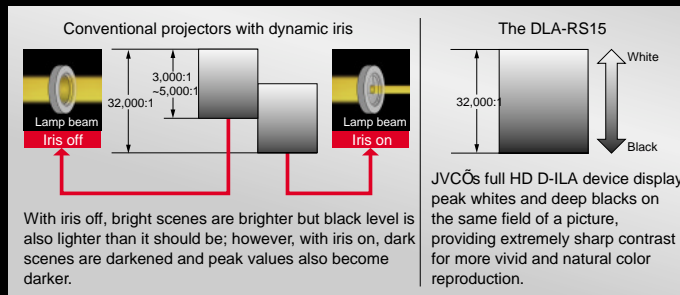

Inverse telecine (reverse 2-3 pulldown)

To display TV broadcasts or commercially available DVDs created using the 2-3 pulldown process, the inverse telecine function re-converts the video source back to a 24fps signal and displays it at double speed or 48 fps, ensuring cinema-like viewing faithful to the original source.

Picture modes for various video sources

There are seven preset and three user-preset picture modes available, each of which is designed to precisely match different video source and/or picture types.

Screen adjustment mode

As the quality of projected images varies depending on the type of screen and its RGB reflective characteristics, JVC D-ILA projectors have three screen adjustment modes that enable users to select the optimum mode to match screen characteristics for more natural and balanced color reproduction.

Quiet operation


Thanks to the enhanced efficiency of the cooling system, fan noise has been reduced to 19dB*, enabling the viewer to better concentrate on what's being shown on the screen even in a very quiet room.

* When lamp mode set to standard mode.

Clear Motion Drive

Clear Motion Drive's high-precision interpolation algorithm enhances the precision of picture-character detection to generate an accurate intermediate frame even for images with rapid movement. Whether broadcasting signal or movie content, viewers can enjoy smoother and clearer images with reduced motion blurring thanks to this unique interpolation technique that optimizes the number of frames.


External dimensions (Unit: Inches / mm)

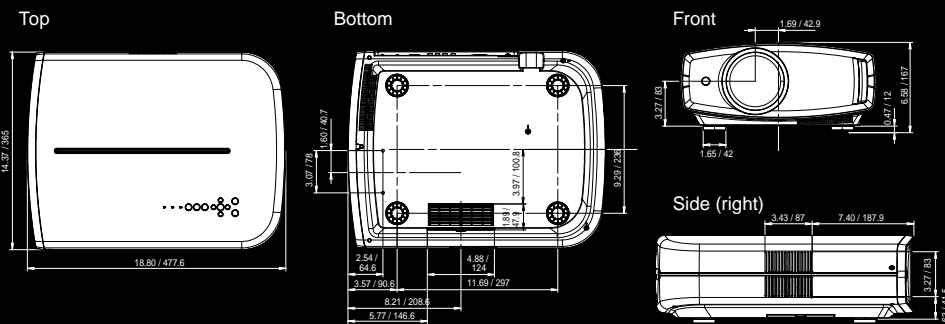

Optional Accessory



Terminals on the side



Projection distance chart

Display size (16:9) Inches and (mm)			Throw distance			
Width	Height	Diagonal	Minimum		Maximum	
			Feet-Inch	Meters	Feet-Inch	Meters
52 1/4	29 3/8 (747)	60 (1523)	5-10	1.78	12-0	3.6
60	33 3/4 (857)	68 1/8 (1749)	6-8 1/4	2.05	13-9 1/2	4.20
70	39 3/8 (1000)	80 1/8 (2040)	7-10	2.39	16 1/4	4.91
80	45 (1143)	91 1/4 (2332)	8-1 3/4	2.74	18-5	5.61
90	50 5/8 (1286)	103 1/4 (2623)	10-1 1/2	3.08	20-8 1/4	6.32
100	56 1/4 (1429)	114 1/4 (2915)	11-3 1/4	3.43	23 1/2	7.02
110	61 7/8 (1572)	126 1/4 (3206)	12-5	3.78	25 1/4	7.73
120	67 1/2 (1715)	137 1/4 (3498)	13-8 1/4	4.13	27-8 1/4	8.44
130	73 1/8 (1857)	149 1/8 (3789)	14-8 1/2	4.49	30 1/4	9.15
140	78 3/4 (2000)	160 1/8 (4081)	15-10 1/2	4.84	32-4	9.86
150	84 3/8 (2143)	172 1/8 (4372)	17 1/2	5.19	34-8	10.57
160	90 (2286)	183 1/8 (4663)	18-2 1/2	5.55	37 1/4	11.28
170	95 3/8 (2429)	195 1/8 (4955)	19-4 1/2	5.91	39-4 1/4	11.99
174 1/4	98 (2490)	200 (5079)	19 1/2	6.06	40-4 1/4	12.30

* Projection distances are design specifications, subject to variation.

Specifications

		DLA-RS15
Device		0.7inch D-ILA x3
Resolution		1920 x 1080 pixels
Lens		2x motorized zoom & focus, f=21.4mm - 42.8mm, F=3.2
Lens shift		80% Vertical 84% Horizontal (motorized)
Projection size (Screen diagonal)		60 - 200 inches
Light source lamp		200W UHP (lamp life: approx. 3,000 hours in Normal mode)
Brightness		1,000lm
Contrast ratio		Native: 32,000:1
Terminals		HDMI (ver.1.3) x2, Component x1 (RCA), S-Video x1 (mini), Composite x1 (RCA), Trigger x1 (mini jack), RS-232C (D-sub)
Video input signal		480i/p, 576i/p, 720p 60/50, 1080i 60/50, 1080p 60/50/24
PC input signal	Digital	VGA/SVGA/XGA/WXGA/WXGA+/SXGA/WSXGA/WUXGA
Noise level		19dB (Normal mode)
Power requirement		AC 110V-240V, 50/60 Hz
Power consumption		310W (Stand-by mode: 0.7W)
Dimensions (W x H x D)		14.37 x 6.58 x 18.82 inches (365 x 167 x 478 mm)
Weight		24.69lbs (11.2kg)

The projector is equipped with a high-pressure mercury lamp, which may break, emitting a loud noise, when it is subjected to some length of time, depending on how the projector is used, there can be considerable difference between individual lamps regarding hours they will operate before requiring replacement. Additional payment is required for installation of a new lamp. The projector lamp requires periodic replacement and is not covered by warranty because, the D-ILA device is manufactured using highly advanced technologies, 0.01% or fewer of the pixels may be non-performing (always on or off).

Design and specifications are subject to change without notice. All pictures on this brochure are simulated. HDMI, DVI, and HDMI Multimedia Interface are trademarks or registered trademarks of HDMI Licensing LLC. All other brand or product names may be trademarks and/or registered trademarks of their respective owners. All rights reserved.

Copyright 2009, Victor Company of Japan, Limited (JVC). All Rights Reserved.



DISTRIBUTED BY

website: pro.jvc.com
e-mail: proinfo@jvc.com

JVC Americas Corp.
1700 Valley Road, Wayne, N.J. 07470
TEL: (973) 317-5000, (800) 582-5825 FAX: (973) 317-5030
Internet Web Site <http://www.jvc.com/pro>
E-mail: proinfo@jvc.com

JVC CANADA INC.
21 Finchdene Square, Scarborough, Ontario M1X 1A7
TEL: (416) 293-1311 FAX: (416) 293-8208
Internet Web Site <http://www.jvc.ca/en/pro/>

Printed in the U.S.A.
CCZ-3613-09
JVC is the trademark or registered trademark of Victor Company of Japan, Limited.